

Assembly Instructions for LINEN CABINET

MODEL NO. CLC 1878-L-2, CLC 1878-R-2 & KL1878

MAKE SURE YOU HAVE RECEIVED ALL NECESSARY PARTS

- A - Front Frame (1) B - Side Panels (2) C - Fixed Shelves (2), Top Panel (1), Bottom Panel (1)
- E - Adjustable Shelves with finished front edge (4) F - Toe Kick (1) Hardware Package - Shelf Holders (16), Door Handles/Knobs (3)
- D - Back Panel (1)

PLEASE HAVE A RELIABLE PERSON TO ASSIST YOU DURING ASSEMBLY
IT IS IMPORTANT TO MAKE SURE THAT CAM SCREWS ON EACH COMPONENTS ARE IN FULLY OPENED POSITION

STEP 1: Place Front Frame (A) face down on carpeted area. With grooved sides facing each other, insert two side panels (B) into grooves on Front Frame (A) with assembly connectors fit together snugly. Turn cam screw clockwise to fasten - Fig. 1

STEP 2: Slide Fixed Shelves (C) (there are four pieces for "CLC" model and three pieces for "KL" model) into grooves of Side Panels (B). Attach Toe Kick panel (F) to the notch of Side Panels - Fig. 2

STEP 3: Place Back Panel (D) on top of the unit with finished side facing inside. Align all connectors while making sure that cam screw in every assembly connectors are in fully opened position (make adjustment if necessary) - Fig. 3

STEP 4: Important: Two-person assembly. Place the unit in an upright position while holding Back Panel in place. Open cabinet door (one at a time) and fasten all assembly connectors in the back. Insert shelf holders and install Shelves (E). Install door knobs/pulls to complete assembly - Fig. 4

STEP 5: For "KL" model only - Assembly of Top Panel with crown molding: Place the Top Panel on the top of cabinet with assembly connectors aligned. Open cabinet door and lock connectors from inside. Attach the front sill/molding to the bottom of cabinet frame with 3 supplied screws. Fig. 4.

To avoid tipping, this cabinet must be properly secured to the wall. Use 2-inch drywall screws (not included) and/or hollow wall anchors when necessary.

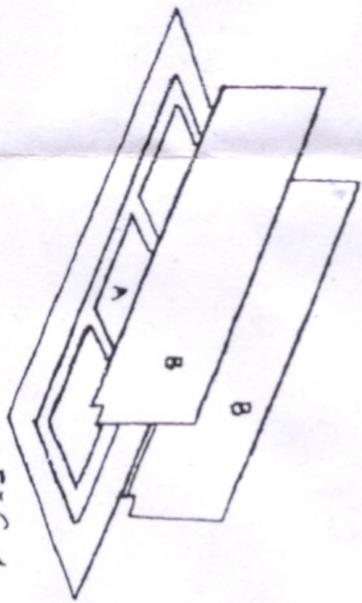


FIG. 1

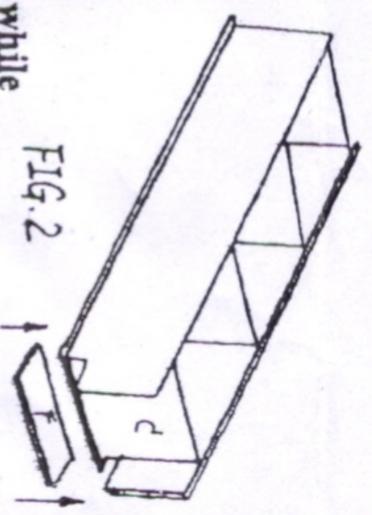


FIG. 2

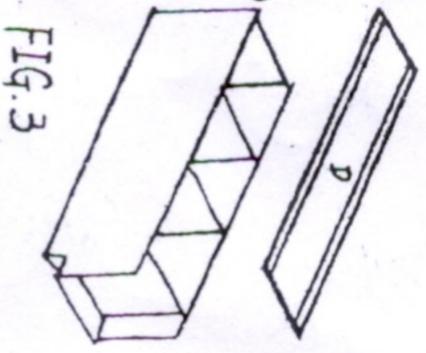


FIG. 3

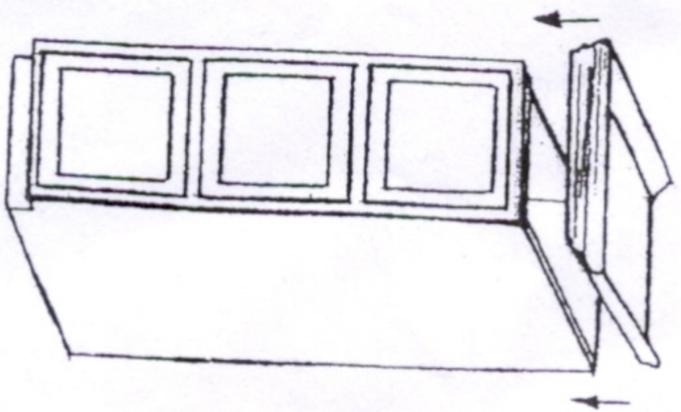


FIG. 4